

Search for the Rare Decays $K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ and $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$

E. Abouzaid,⁴ M. Arenton,¹¹ A.R. Barker,^{5,*} L. Bellantoni,⁷ E. Blucher,⁴ G.J. Bock,⁷ E. Cheu,¹ R. Coleman,⁷ M.D. Corcoran,⁹ B. Cox,¹¹ A.R. Erwin,¹² C.O. Escobar,³ A. Glazov,⁴ A. Golossanov,^{11,7} R.A. Gomes,³ P. Gouffon,¹⁰ Y.B. Hsiung,⁷ D.A. Jensen,⁷ R. Kessler,⁴ K. Kotera,⁸ A. Ledovskoy,¹¹ P.L. McBride,⁷ E. Monnier,^{4,†} H. Nguyen,⁷ R. Niclasen,⁵ D.G. Phillips II,^{11,‡} H. Ping,¹² E.J. Ramberg,⁷ R.E. Ray,⁷ M. Ronquest,¹¹ E. Santos,¹⁰ W. Slater,² D. Smith,¹¹ N. Solomey,⁴ E.C. Swallow,^{4,6} P.A. Toale,⁵ R. Tschirhart,⁷ C. Velissaris,¹² Y.W. Wah,⁴ J. Wang,¹ H.B. White,⁷ J. Whitmore,⁷ M.J. Wilking,⁵ B. Winstein,⁴ R. Winston,⁴ E.T. Worcester,⁴ M. Worcester,⁴ T. Yamanaka,⁸ E.D. Zimmerman,⁵ and R.F. Zukanovich¹⁰

(The KTeV Collaboration)

¹ University of Arizona, Tucson, Arizona 85721

² University of California at Los Angeles, Los Angeles, California 90095

³ Universidade Estadual de Campinas, Campinas, Brazil 13083-970

⁴ The Enrico Fermi Institute, The University of Chicago, Chicago, Illinois 60637

⁵ University of Colorado, Boulder Colorado 80309

⁶ Elmhurst College, Elmhurst, Illinois 60126

⁷ Fermi National Accelerator Laboratory, Batavia, Illinois 60510

⁸ Osaka University, Toyonaka, Osaka 560-0043 Japan

⁹ Rice University, Houston, Texas 77005

¹⁰ Universidade de Sao Paulo, Sao Paulo, Brazil 05315-970

¹¹ University of Virginia, Charlottesville, Virginia 22904

¹² University of Wisconsin, Madison, Wisconsin 53706

The KTeV E799 experiment has conducted a search for the rare decays $K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ and $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$, where the X^0 is a possible new light neutral boson that was reported by the HyperCP experiment with a mass of $(214.3 \pm 0.5) \times 10^{-3} \text{ GeV}/c^2$. We find no evidence for either decay. We obtain upper limits of $\text{Br}(K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-) < 9.6 \times 10^{-11}$ and $\text{Br}(K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-) < 8.7 \times 10^{-11}$ at the 90% confidence level.

PACS numbers: 13.20.Eb, 13.25.Es

The HyperCP collaboration has reported the possible observation of an X^0 boson of mass $(214.3 \pm 0.5) \times 10^{-3} \text{ GeV}/c^2$ decaying into $\mu^+ \mu^-$ based on three observed events in a search for the decay $\Sigma^+ \rightarrow p \mu^+ \mu^-$ [1]. The confidence level within the standard model for the three events to overlap in $M_{\mu\mu}$ is less than 1%. As the X^0 would presumably be a strange-to-down neutral current, it is natural to look for it in the kaon sector, specifically in the mode $K_L \rightarrow \pi \pi X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$. This letter presents the first attempt to detect the rare decay modes $K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ and $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$.

Using a two-quark flavor changing coupling model in which the X^0 couples to $\bar{d}s$ and $\mu^+ \mu^-$, theoretical estimates of the $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ branching ratio were determined for a pseudoscalar X^0 and an axial vector X^0 [2]. Reference [2] uses the known value $\text{Br}(K^\pm \rightarrow \pi^\pm \mu^+ \mu^-) = 8.1 \times 10^{-8}$ [3] to rule out the possibility of a scalar or vector X^0 as explanations of the HyperCP anomaly. These predictions assume real $\bar{d}sX^0$ couplings, g_P ; for a complex coupling with a dominant imaginary term, $|\Im(g_P)| > 0.98|g_P|$, the predicted upper limit is much smaller [4]. Another prediction of $\text{Br}(K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-)$ for a pseudoscalar X^0 has been made [5], while the branching ratio for $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \gamma \gamma$ has been estimated using an sgoldstino model [6]. These results are summarized in

Table I.

The E391a collaboration has reported [7] an upper limit $\text{Br}(K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \gamma \gamma) < 2.4 \times 10^{-7}$, which rules out the sgoldstino model of this decay. The possibility [8] that X^0 could be a light pseudoscalar Higgs boson of the next-to-minimal supersymmetric standard model (NMSSM) was investigated at $e^+ e^-$ colliders by CLEO [9] and BaBar [10] and at the TeVatron (D0) [11]. No evidence for an NMSSM light pseudoscalar Higgs boson was found.

The $K_L \rightarrow \pi \pi X^0$ modes have an extremely limited phase space. The phase space of $K_L \rightarrow \pi^0 \pi^0 X^0$ is ten times larger than the phase space available to $K_L \rightarrow \pi^+ \pi^- X^0$, motivating the search for the former over the latter. We have searched for $K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ and $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ in data from the 1997 and 1999 runs of KTeV E799 II at Fermi National Accelerator Laboratory.

The KTeV E799 experiment produced neutral kaons via collisions of 800 GeV/c protons with a BeO target. The particles created from interactions with the target passed through a series of collimators, absorbers and sweeper magnets to produce two nearly parallel K_L beams. The K_L beams then entered a 70 m long vacuum tank, which was evacuated to 1 μTorr . Immediately downstream of the vacuum region was a spectrom-

$X^0 \rightarrow \mu^+ \mu^-$ Model	$\text{Br}(K_L \rightarrow \pi^0 \pi^0 X^0)$
Pseudoscalar ($\Re(g_P)$) [2]	$(8.3_{-6.6}^{+7.5}) \times 10^{-9}$
Axial Vector ($\Re(g_A)$) [2]	$(1.0_{-0.8}^{+0.9}) \times 10^{-10}$
Pseudoscalar ($ \Im(g_P) > 0.98 g_P $) [4]	$< 7 \times 10^{-11}$
Pseudoscalar [5]	8.02×10^{-9}
sgoldstino ($X^0 \rightarrow \gamma\gamma$) [6]	1.2×10^{-4}

TABLE I: Summary of predicted branching ratios for $K_L \rightarrow \pi^0 \pi^0 X^0$.

eter composed of an analysis magnet between two pairs of drift chambers. The momentum resolution of the spectrometer is given by $\sigma_P/P = 0.38\% \oplus 0.016\%P$, with P in units of GeV/ c .

The electromagnetic calorimeter was constructed of 3100 pure CsI crystal blocks arranged into a 1.9×1.9 m² array. Each CsI crystal was 27 radiation lengths long. Two holes were located near the center of the calorimeter to allow for passage of the beams. The electromagnetic calorimeter had an energy resolution of $\sigma_E/E \simeq 0.4\% \oplus 2\%/\sqrt{E[\text{GeV}]}$ and the position resolution was about 1 mm. The muon ID system used a Pb wall, three steel filters and three scintillator counter planes to identify muons by filtering out other charged particles. The muon ID system contained 31 nuclear interaction lengths of material and had a charged pion fake rate of $(1.69 + 0.17P [\text{GeV}/c]) \times 10^{-3}$, where P is the track momentum. A photon veto system detected photons outside the detector acceptance. The upstream section of the photon veto system had five lead-scintillator counter arrays located inside the vacuum decay region. The downstream section of the photon vetos had four lead-scintillator arrays that framed the outside of the last three drift chambers and the CsI calorimeter. A more detailed description of the KTeV detector and photon veto system can be found in [12, 13].

Between the 1997 and 1999 runs, the beam's duty factor was doubled and the proton intensity on the target was increased by a factor of 2 to 3. The momentum kick imparted by the magnetic field to charged particles was reduced from 0.205 GeV/ c to 0.150 GeV/ c , giving an increased acceptance for kaon decay modes with charged decay products.

The signal modes and normalization mode ($K_L \rightarrow \pi^0 \pi^0 \pi_D^0$, $\pi_D^0 \rightarrow e^+ e^- \gamma$) were collected by different triggers. The triggers required in-time energy clusters in the calorimeter of at least 1 GeV. The signal mode required one (two) such clusters for the 1997 (1999) data taking periods. The normalization mode trigger required at least four in-time clusters and two tracks.

Both tracks were required to form a good vertex within the vacuum decay region, to match a cluster in the CsI calorimeter and to deposit less than 1 GeV of energy in the CsI calorimeter, consistent with a muon hypothesis.

99.9% of muons with a track momentum over 7.0 GeV/ c satisfied the last three requirements. Each of the three scintillator counting planes in the muon ID system were required to register at least one hit. The invariant $\mu^+ \mu^-$ mass, $M_{\mu\mu}$, was required to be less than $0.232 \text{ GeV}/c^2$, which is slightly above the kinematic limit given by $M_K - 2M_\pi$.

Four clusters in the calorimeter without associated tracks were required. Because of the narrow opening angle of the $\mu^+ \mu^-$, the resolution of the z-vertex determined from the charged tracks was worse than the resolution of the z-vertex from two $\gamma\gamma$ vertices associated with a $\pi^0 \pi^0$. We considered each possible $\gamma\gamma$ pair to find the combination with the best agreement between the positions of the two $\gamma\gamma$ decay points under the hypothesis that they originated from a π^0 decay. A minimum pairing chi-squared, χ_z^2 , was calculated to determine the best agreement between the positions of the two $\gamma\gamma$ decay points. A weighted average of z-vertex values for each $\gamma\gamma$ in the pairing with the minimum χ_z^2 was used as the decay vertex for the event. This vertex was then required to be located within the length of the vacuum decay region. A $\gamma\gamma$ mass, $M_{\gamma\gamma}$, was calculated for the event using the decay vertex from the minimum χ_z^2 pairing. $M_{\gamma\gamma}$ was required to be within 0.009 GeV/ c^2 of the π^0 mass.

The $K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ simulation was modeled as a four body decay using a constant matrix element. The $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ simulation was modeled as a three body decay with a flat phase space, where the X^0 underwent a prompt decay to $\mu^+ \mu^-$.

The signal regions for the 1997 and 1999 data were based on the $M_{\mu\mu\gamma\gamma\gamma\gamma}$, $p_T^2(\mu\mu\gamma\gamma\gamma\gamma)$ and $|p_{T,\mu\mu}^2 - p_{T,\pi\pi}^2|$ resolutions calculated in the simulation. Here p_T^2 is measured relative to the direction of the K_L determined by the line connecting the BeO target center and the vertex. For a well-measured decay, $p_T^2(\mu\mu\gamma\gamma\gamma\gamma)$ and $|p_{T,\mu\mu}^2 - p_{T,\pi\pi}^2|$ should be close to zero. The signal region for the decay $K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ was defined as $0.495 \text{ GeV}/c^2 \leq M_{\mu\mu\gamma\gamma\gamma\gamma} \leq 0.501 \text{ GeV}/c^2$ and $p_T^2 \leq 1.3 \times 10^{-4} (\text{GeV}/c)^2$. An additional signal region for the $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ decay was defined as $213.8 \times 10^{-3} \text{ GeV}/c^2 \leq M_{\mu\mu} \leq 214.8 \times 10^{-3} \text{ GeV}/c^2$ and $|p_{T,\mu\mu}^2 - p_{T,\pi\pi}^2| \leq 7.0 \times 10^{-4} (\text{GeV}/c)^2$. The bound on $M_{\mu\mu}$ was determined from the proposition that the observations made by HyperCP reflect the natural width of the X^0 . Further details can be found in [14]. Figure 1 shows p_T^2 vs. invariant mass plots of the $K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ and $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ signal mode Monte Carlo respectively.

Every K_L decay mode with two minimum ionizing tracks and at least one photon was considered as a potential source of background. Accidental time-coincident activity created from particle interactions in the vacuum window, neutrons from the target, cosmic rays, beam interactions or another kaon decay in flight can overlap

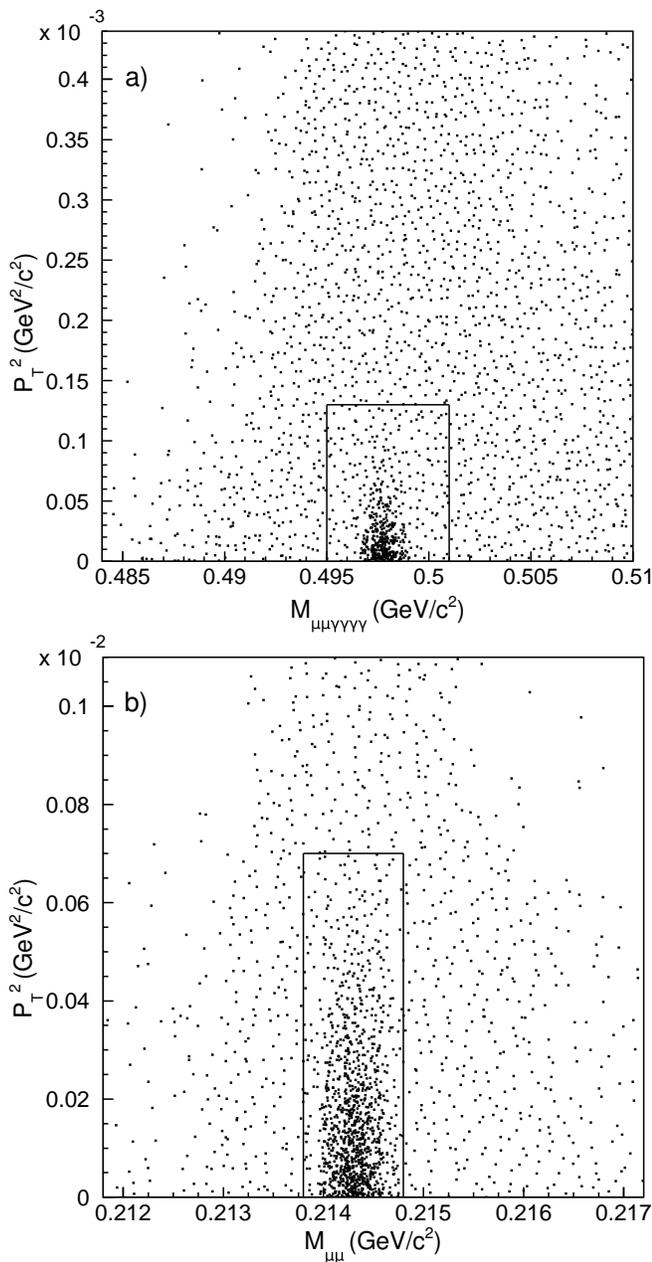


FIG. 1: a) p_T^2 vs. $M_{\mu\mu\gamma\gamma\gamma}$ plot for the 1997 $K_L \rightarrow \pi^0\pi^0\mu^+\mu^-$ Monte Carlo. The boxed signal region contains 90% of all events. b) $|p_{T,\mu\mu}^2 - p_{T,\pi\pi}^2|$ vs. $M_{\mu\mu}$ plot for the 1997 $K_L \rightarrow \pi^0\pi^0 X^0 \rightarrow \pi^0\pi^0\mu^+\mu^-$ Monte Carlo. The boxed signal region contains 95% of all events. Both plots are shown after all analysis requirements were applied.

with the primary kaon decay in an event to reproduce the signal mode topology. Accidental activity was included in the simulation of all background mode events.

Small branching ratio backgrounds such as the dimuon modes, $K_L \rightarrow \pi^0\pi^\pm\mu^\mp\nu_\mu$ and $K_L \rightarrow \pi^+\pi^-\gamma$ were simulated extensively. Significant Monte Carlo generation with large branching ratio modes such as $K_L \rightarrow \pi^\pm\mu^\mp\nu_\mu$,

$K_L \rightarrow \pi^+\pi^-\pi^0$ and $K_L \rightarrow \pi^+\pi^-$ was not feasible. Accidental activity coupled with a background mode to produce the signal mode topology will push p_T^2 above the signal region and force the invariant mass, $M_{\mu\mu\gamma\gamma\gamma}$, to values higher than the K_L mass. Based on simulations and kinematics, we expect the background to be negligible and this is confirmed from the data. We conservatively estimate the background to be zero.

The normalization mode shares the topological trait of four photons and two tracks with the signal mode and has a well-measured branching ratio. As in the signal mode, the four photons which gave the minimum pairing chi-squared of the z-vertex were associated with the π^0 pair for that event. The remaining photon was partnered with the $\pi_D^0 \rightarrow e^+e^-\gamma$ decay. The vertex in the normalization mode analysis was required to be located within the vacuum decay region.

The only noticeable background to the normalization mode occurred when a photon from $K_L \rightarrow \pi^0\pi^0\pi^0$ underwent pair production in the vacuum window or in material upstream of the first drift chamber. $M_{ee\gamma\gamma\gamma\gamma}$ was required to be between 0.473 and 0.523 GeV/c^2 , while $p_T^2 \leq 0.001 \text{ GeV}^2/c^2$ and $M_{\gamma\gamma}$ was situated within 0.014 GeV/c^2 of the π^0 mass. Only one $K_L \rightarrow \pi^0\pi^0\pi^0$ event with a converted photon was found in a simulation sample equivalent to twice the data set.

The flux, F_K , is the number of K_L decays in the vacuum decay region. Uncertainties in the flux originated from the branching ratio used to calculate the flux, uncertainty in the kinematical analysis requirements, the muon ID system efficiency and the resolution of the z-component of the K_L -momentum (p_Z). The +z-direction is parallel to the downstream beam direction and points from the target to the detector. The statistical uncertainties on the signal mode Monte Carlo were less than 0.14% for each decay mode, while the statistical uncertainty for both the normalization mode data and Monte Carlo was less than 0.31%. Uncertainty from kinematical analysis requirements was determined by varying the vertex, $M_{ee\gamma\gamma\gamma\gamma}$, p_T^2 , $M_{\gamma\gamma}$ and E/p cuts. Event weights were applied to the simulation so that the data/simulation ratio was independent of p_Z . These weights were then used to determine the systematic uncertainty on the simulation of the p_Z distribution. Systematic uncertainty in the muon ID efficiency came from modeling of the energy loss in the muon filters and from simulation of gaps between scintillator paddles in the muon counting planes [15]. A systematic uncertainty from the muon counting plane time-to-digital converter (TDC) inefficiency was determined by counting the number of in-time hits registered in each view of the last two muon counting planes from a clean sample of $K_{\mu 3}$ decays [16]. Signal and normalization modes were collected by different triggers and cross-trigger effects led to a 15% systematic uncertainty in the K_L flux normalization. Results from these systematic uncertainty studies are given in Table II.

Systematic Uncertainty on F_K	$\frac{\Delta F_K(1997)}{F_K(1997)}$	$\frac{\Delta F_K(1999)}{F_K(1999)}$
Variation of Kinematic Requirements	+1.26%	+2.24%
p_z Weighting	—	1.87%
μ Counting Plane TDC Inefficiency	2.00%	2.00%
Cracks in Muon Counting Planes	0.50%	0.50%
Energy Loss in Muon Filters	0.40%	0.40%
$Br(K_L \rightarrow \pi^0 \pi^0 \pi^0)$	0.61%	0.61%
Normalization	15.00%	15.00%
Total Systematic Uncertainty	+15.21%	+15.44%

TABLE II: Summary of systematic uncertainties on the K_L flux, labeled as F_K .

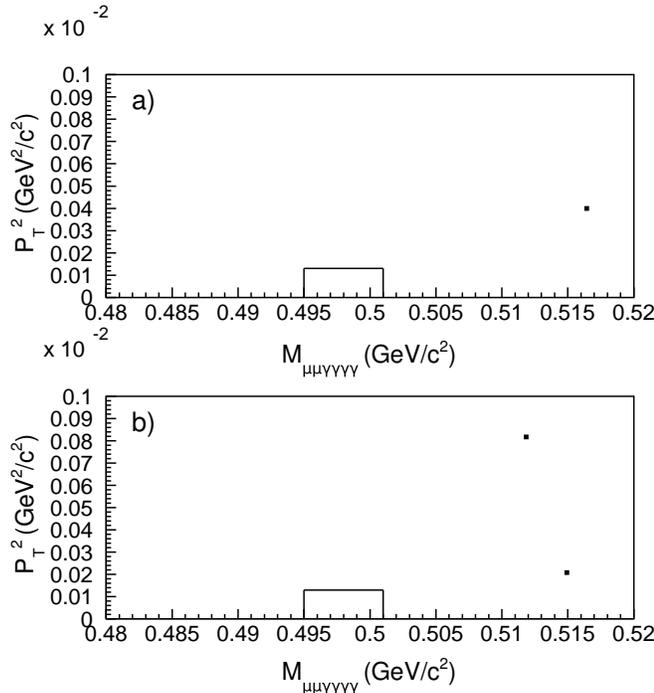


FIG. 2: a) p_T^2 vs. $M_{\mu\mu\gamma\gamma\gamma}$ plots for the 1997 data set and b) 1999 data set. The signal box in each plot is open.

were found within the available $\mu^+\mu^-$ phase space. Using the method of [17], the 90% confidence level upper limits are $Br(K_L \rightarrow \pi^0 \pi^0 \mu^+ \mu^-) < 8.7 \times 10^{-11}$ and $Br(K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-) < 9.6 \times 10^{-11}$.

Our result for $Br(K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-)$ is nearly two orders of magnitude smaller than the expected branching ratios for $K_L \rightarrow \pi^0 \pi^0 X^0 \rightarrow \pi^0 \pi^0 \mu^+ \mu^-$ from [2] and [5], in which X^0 was taken to be a pseudoscalar. This rules out the pseudoscalar X^0 as an explanation of the HyperCP result under the premise that g_P is completely real and also places a tight bound on g_P of $|\Im(g_P)| > 0.98|g_P|$ [4]. Finally, our upper limit challenges the axial-vector X^0 explanation of the HyperCP result.

We thank the Fermi National Accelerator Laboratory staff for their contributions. This work was supported by the U.S. Department of Energy, the U.S. National Science Foundation, the Ministry of Education and Science of Japan, the Fundao de Amparo a Pesquisa do Estado de Sao Paulo-FAPESP, the Conselho Nacional de Desenvolvimento Cientifico e Tecnologico-CNPq, and the CAPES-Ministerio da Educao.

* Deceased.

† Permanent address: C.P.P. Marseille/C.N.R.S., France.

‡ Correspondence should be addressed to David Graham Phillips II at dgp6d@virginia.edu

- [1] H.K. Park *et al.* (HyperCP Collaboration), *Phys. Rev. Lett.* **94**, 021801 (2005).
- [2] X.-G. He, J. Tandean, and G. Valencia, *Phys. Lett. B* **631**, 100 (2005).
- [3] S. Eidelman *et al.*, Particle Data Group, *Phys. Lett. B* **592**, 1 (2004).
- [4] S. Oh and J. Tandean, *JHEP* **01**, 022 (2010).
- [5] N.G. Deshpande, G. Eilam, and J.Jiang, *Phys. Lett. B* **632**, 212 (2006).
- [6] D.S. Gorbunov and V.A. Rubakov, *Phys. Rev. D* **73**, 035002 (2006).
- [7] Y.C. Tung *et al.*, *Phys. Rev. Lett.* **102**, 051802 (2009).
- [8] X.-G. He, J. Tandean, and G. Valencia, *Phys. Rev. Lett.* **98**, 081802 (2007).
- [9] W. Love *et al.*, *Phys. Rev. Lett.* **101**, 151802 (2008).
- [10] B. Aubert *et al.*, *Phys. Rev. Lett.* **103**, 181801 (2009).
- [11] V.M. Abazov *et al.*, *Phys. Rev. Lett.* **103**, 061801 (2009).
- [12] A. Alavi-Harati *et al.*, *Phys. Rev. D* **67**, 012005 (2003).
- [13] C. Bown *et al.*, *Nucl. Instrum. Meth.* **A369**, 248 (1996).
- [14] D.G. Phillips II, PhD Thesis, Univ. of Virginia (2009).
- [15] B. Quinn, PhD Thesis, Univ. of Chicago (2000).
- [16] M. Corcoran, *Lepton-Flavor-Violating Decays Combined Analysis*, KTeV Internal Document (2007).
- [17] R.D. Cousins and V.L. Highland, *Nucl. Instrum. Meth.* **A320**, 331 (1992).